




comfee' ...is how I feel!

Inverter Midwall Split Air conditioner

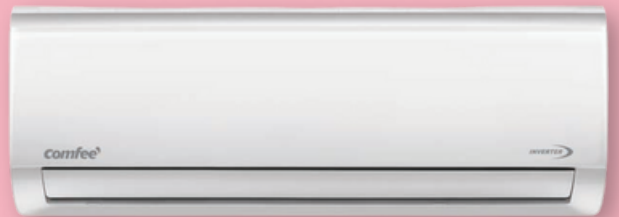

-  Heating and Cooling
-  WI-FI compatible (dongle additional extra)
-  Inverter Technology
-  Low Noise Operation
-  Wired Controller Compatible (additional extra)
-  **2 year warranty** on the unit and
3 year warranty on the compressor
-  3m copper pipe kit included



Comfee Inverter Midwall Split Air conditioner

comfee'
...is how I feel!

With Comfee Inverter Midwall, you can easily control the temperature in your home. Smart and elegantly designed, with an indoor noise level of 24.0 dB(A) (on low setting) ensures a quiet operation. The unit has a wide-angle airflow ensuring perfect heating and cooling air distribution, so it always maintains a comfortable temperature.



Indoor			FCMI-09	FCMI-12	FCMI-18	FCMI-24
Power supply		V-Ph-Hz	220_240V_1PH,FREQUENCY_50HZ	220_240V_1PH,FREQUENCY_50HZ	220_240V_1PH,FREQUENCY_50HZ	220_240V_1PH,FREQUENCY_50HZ
Cooling			9000(4000~11000)	12000(2700~12200)	18000(4500~18500)	23000(4000~23200)
(Standard conditions)	Capacit	Btu/h	2638	3517	5275	6741
	y	W	822(100~1250)	1141(150~1170)	1580(465~2130)	2217(300~2289)
	Capacit	W	3.6(0.4~5.5)	4.9(1.2~5.2)	7.6(2.0~9.5)	9.8(1.4~10.4)
	y Input	A	3.21	3.08	3.10	3.25
	Current	W/W	10000(3100~12800)	12000(2800~12700)	18500(4400~19000)	3,04
Heating (Standard conditions)	EER	Btu/h	2931	3517	5422	23500(4200~23800)
	Capacit	W	812(140~1340)	1040(380~1150)	1530(300~1810)	6887
	y	W	3.6(0.6~5.8)	4.7(3.3~5.1)	6.9(2.0~8.1)	2120(400~2200)
	Capacit	A	3.61	3.38	3.54	8.9(1.8~9.4)
	y Input	W/W	2300	2300	2800	3,25
Rated PowerInput	Current	W	10.5	10.5	13.5	3000
Rated Current	COP	A	2035/3255	2020/3245 ±3%	4385	13.5
Compressor	Capacity	W	325/826	332/850 ±3%	1140	4730
	Input	W	2.40/5.65	2.42/5.70 ±3%	7.50	1250
	Rated current(RLA)	A	3	3	4	8.10
		3				
Number of circuits		m3/h	417/319/256	600/450/350	805/640/530	4
Indoor air flow (Hi/Mi/Lo)		dB(A)	36.5/30.5/24.0	42/35/30	43/38/32.5	970/760/620
Indoor noise level (Hi/Mi/Lo)		mm	715x194x285	805x194x285	957x213x302	44.5/39/34
Indoor unit	Dimension(W*D*H)	mm	780x270x365	870x270x365	1035x295x385	1040x220x327
	Packing (W*D*H)	mm	7.5/9.5	8.2/10.4	10.24/13.1	1120x405x315
	Net/Gross weight	kg	FCMI-09X	FCMI-12X	FCMI-18X	12/15.4
Outdoor			2	2	2	FCMI-24X
Number of circuits			1800	1800	2500	4
Outdoor air flow		m3/h	55.0	55.5	56.5	2500
Outdoor noise level		dB(A)	720x270x495	720x270x495	805x330x554	55.5
Outdoor unit	Dimension(W*D*H)	mm	835x300x540	835x300x540	915x370x615	805x330x554
	Packing (W*D*H)	mm	22.8/24.8	20.4/22.2	30.44/33	915x370x615
	Net/Gross weight	kg	R410A/0.59	R410A/0.74	R410A/1.25	31.7/34.3
Refrigerant type		kg	6.35mm(1/4in)/9.52mm(3/8in)	6.35mm(1/4in)/12.7mm(1/2in)	6.35mm(1/4in)/12.7mm(1/2in)	R410A/1.5
Refrigerant piping	Liquid side/ Gas side	mm(inch)	25	25	30	9.52mm(3/8in)/15.9mm(5/8in)
	Max. refrigerant pipelength	m	10	10	20	30
	Max. difference in level	m	1.5x4//	1.5x4//	1.5x4//	20
Connection wiring			1.5x3/VDE	1.5x3/VDE	1.5x3/no-plug	1.5x4//
Plug type			(IR Remote Control)	(IR Remote Control)	(IR Remote Control)	//no-plug
Thermostat type			17~32/0~30	17~32/0~30	17~32/0~30	(IR Remote Control)
Room temperature	Indoor(cooling/ heating)	C	0~50/-15~30	0~50/-15~24	-15~50/-15~30	17~32/0~30
	Outdoor(cooling/heating)	°				0~50/-15~30

* ADDITIONAL EXTRAS

- **Wi-Fi dongle:** Model# 17310900003165
- **Wired remote:** Model# KJR-29B – 17317100000055

Comfee reserves the right to discontinue or change specifications at any time without notice and without incurring obligation. E&OE.

comfee'